



# EASY RAPID PLUS

## BRACCI EGRESSO PER INFISSI A SPORGERE, BATTENTE E VASISTAS



Cerniere egresso | Stay hinge for outside, casement and transom opening | Compases para proyectante exterior, batiente y abatible | Compas ouverture extérieure pour ouvertures projetant, frappe et à soufflet

 Cerniere in acciaio inox AISI 304 con pattino di frizionamento rivestito in nylon autolubrificante, regolatore di posizionamento in zama.


 Hinge in AISI 304 stainless steel with friction shoe covered in self-lubricating nylon, zamak position regulator.

 Charnières en acier inox AISI 304 avec patin de friction revêtu en nylon autolubrifiant, régulateur de position en zamak.



 Bisagras de acero inox AISI 304 con cojinete de fricción revestido en nylon autolubricante, regulador de posicionamiento de zamac.




ART.	1292.16   1292.18			
Imballo   Package   Conditionnement   Embalaje	5 Cp			
Finiture disponibili   Available finishes Finitions disponibles   Acabados disponibles	1	2	3	4

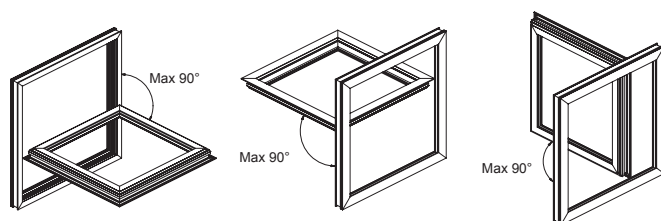

ART.	L		ALTEZZA ANTA SASH HEIGHT	LARGHEZZA ANTA SASH WIDTH	TIPO DI APERTURA OPENING	ANGOLI DI APERTURA OPENING ANGLE		PORTATA MAX LOAD Kg
	inch	mm	Min   Max	Min   Max		Opening Angle	Opening Limitation	
1292.16	16"	414	450   1800	450   750	Battente   Side Hung	α 0-30°	vite   screw	42
			α 0-50°	4x 1250				
			450   1200	450   1200	Sporgere   Top Hung	α 0-20°	vite   screw + 1x 1250	100
1292.18	18"	463	450   1200	450   1200	Vasistas   Bottom Hung	α 0-30°	vite   screw	60
			500   1800	500   800	Battente   Side Hung	α 0-30°	vite   screw	45
			α 0-50°	4x 1250				
1292.18	18"	463	500   1450	500   1450	Sporgere   Top Hung	α 0-20°	vite   screw + 1x 1250	100
			500   1450	500   1450	Vasistas   Bottom Hung	α 0-30°	vite   screw	60
			α 0-30°	vite   screw	100			

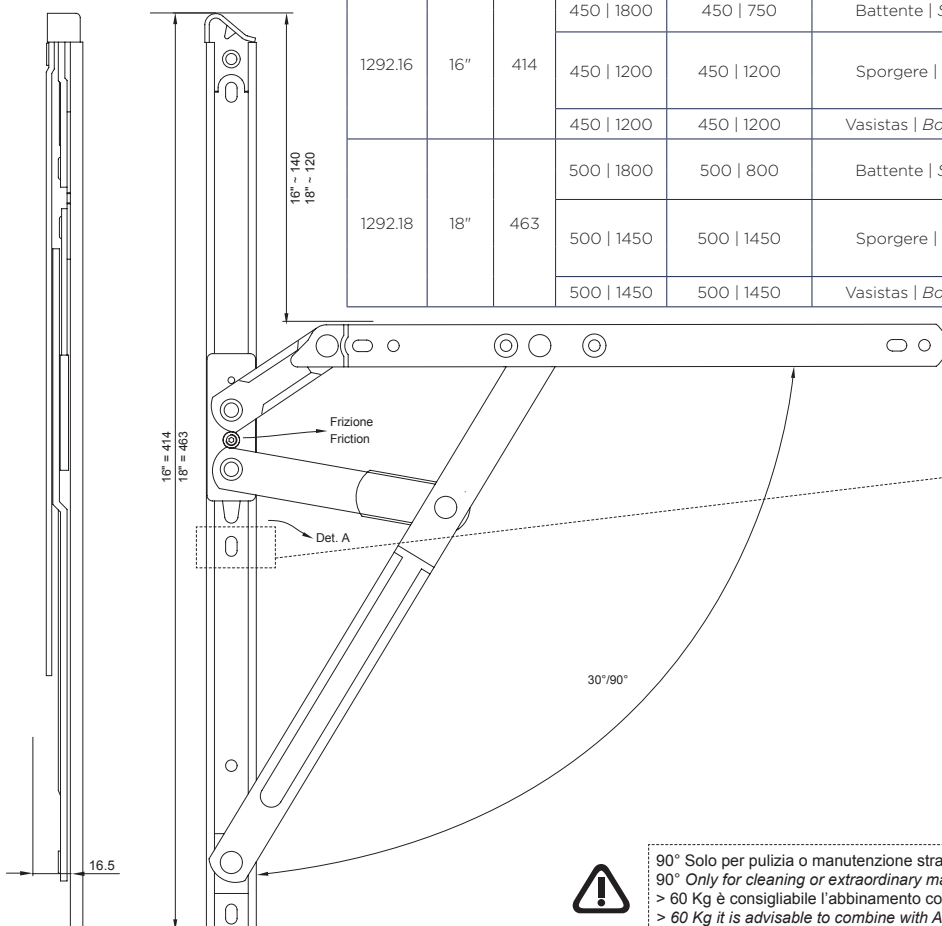

Nodo di riferimento  
Cross section reference



90° Solo per pulizia o manutenzione straordinaria  
 90° Only for cleaning or extraordinary maintenance  
 > 60 Kg è consigliabile l'abbinamento con A1203A.XX  
 > 60 Kg it is advisable to combine with A1203.XX