



BING

MOVIMENTAZIONE BIDIREZIONALE REGOLABILE



Movimentazione bidirezionale | Two-way movement |
Mouvement bidirectionnel | Movimiento bidireccional



Realizzata in zama zincata; tassello di regolazione in nylon, entrata regolabile



Made of galvanized zamak; Nylon adjustment plug, adjustable entry



Réalisé en zamak zinguée; pièce de réglage en nylon, entrée réglable




Fabricado en zamak galvanizado; Taco de regulación en nylon, entrada ajustable




ART.	3626.1 3626.2			
Imballo Package Conditionnement Embalaje	10 PZ			
Finiture disponibili Available finishes Finitions disponibles Acabados disponibles	1	2	3	4

DESCRIZIONE DESCRIPTION	ART.	ENTRATA MIN. MIN BACKSET	ENTRATA MAX MAX BACKSET	NODI SECTION
"BING" Movimentazione bidirezionale "BING" Two-way movement	3626.1	15	27	A01 - A02 A03 - A05 - A06 - A08
	3626.2	23	35	



Art. 3626.1

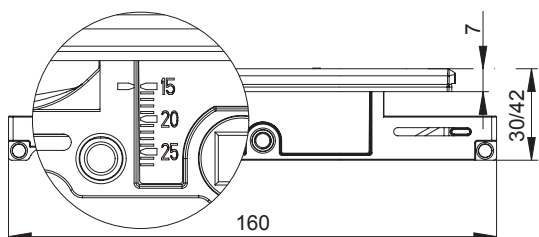

Art. 3626.2

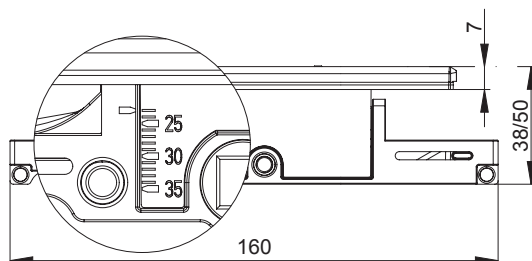

Art.	L	ENTRATA BACKSET
6420E.11	11 mm	15-20 mm
6420E.13	13 mm	16-22 mm
6420E.16	16 mm	19-25 mm
6420E.18	18 mm	22-27 mm
6420E.22	22 mm	25-31 mm
6420E.25	25 mm	28-34 mm
6420E.27	27 mm	30-36 mm
6420E.31	31 mm	34-40 mm



LAVORAZIONI | MACHINING

