



WEEN

BRACCIO PER ANTA RIBALTA



Braccio anta ribalta Ween | Ween tilt and turn arm
Bras oscillo-battant Ween | Compás oscilobatiente Ween



Leve, viti e grani in
Acciaio inox, corpo
in zama, antivento in
nylon



Levers, screw and
setscrews in stainless
steel, zamak body,
nylon windproof
system





Leviers, vis et grains
en acier inox, corps
en zamak, système
protégeant du vent
en nylon



Levas, tornillos
y prisioneros de
acero inox, cuerpo
de zamac, sistema
contaviento de nylon



ART.	TUTTI ALL TOUS TODOS
Imballo Package Conditionnement Embalaje	5 Pz
Finiture disponibili Available finishes Finitions disponibles Acabados disponibles	1 2 3 4

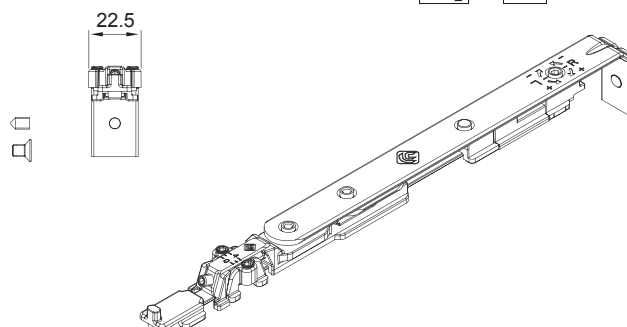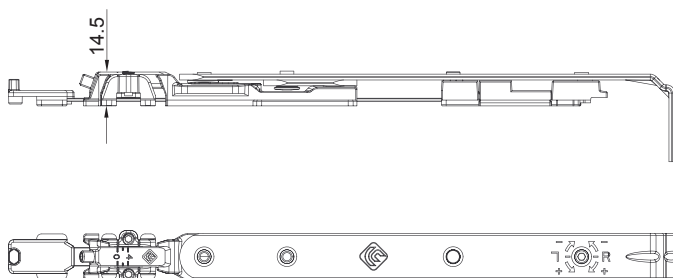


ANTA RIBALTA TILT AND TURN		
DESCRIZIONE DESCRIPTION	ART.	NODO SECTION
L anta da 370mm a 450mm L sash from 370mm to 450mm	3402.20	A01 - A03 - A05
L anta da 451mm a 650mm L sash from 451mm to 650mm	3402.21*	A01 - A03 - A05
L anta da 651mm a 1700mm L sash from 651mm to 1700mm	3402.22*	A01 - A03 - A05

* Perno microventilazione integrato
* Microventilation pin built-in

I bracci possono essere utilizzati per apertura standard e logica
Arms are suitable for standard Tilt & Turn and also for Tilt before Turn

STANDARD	LOGICA TILT BEFORE TURN

REGOLAZIONI | ADJUSTEMENT

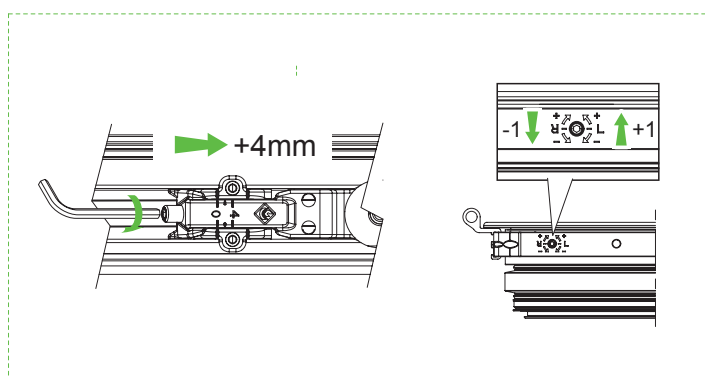



DIAGRAMMI DI CARICO

LOAD CHART

TABELLE DI CARICO PER CONFIGURAZIONI MONOANTA
LOAD CHARTS FOR ONE SASH CONFIGURATIONS

100 kg												
spessore vetro max maximum thickness of the glass - s [mm]												
2700	40	37	30	25	21	19	16	15	13	12	11	11
2600	42	38	31	26	22	19	17	15	14	13	12	11
2500	43	40	32	27	23	20	18	16	15	13	12	11
2400	45	42	33	28	24	21	19	17	15	14	13	12
2300	47	43	35	29	25	22	19	17	16	14	13	12
2200	49	45	36	30	26	23	20	18	17	15	14	13
2100	50	48	38	32	27	24	21	19	17	16	15	14
2000	50	50	40	33	29	25	22	20	18	17	15	14
1900	50	50	42	35	30	26	23	21	19	18	16	15
1800	50	50	44	37	32	28	25	22	20	19	17	16
1700	50	50	47	39	34	29	26	24	21	20	18	15
1600	50	50	50	42	36	31	28	25	23	21	17	16
1500	50	50	50	44	38	33	30	27	24	22	18	17
1400	50	50	50	48	41	36	32	29	26	21	20	18
1300	50	50	50	50	44	38	34	31	25	23	21	16
1200	50	50	50	50	48	42	37	30	27	25	19	14
1100	50	50	50	50	50	45	36	33	30	23	17	16
1000	50	50	50	50	50	50	40	36	27	20	18	11
900	50	50	50	50	50	50	44	27	24	15	7	N.D.
800	50	50	50	50	50	50	33	30	18	8	N.D.	N.D.
700	50	50	50	50	50	43	38	11	N.D.	N.D.	N.D.	N.D.
600	50	50	50	50	50	33	15	N.D.	N.D.	N.D.	N.D.	N.D.
500	50	50	50	50	46	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.
H / L	370	400	500	600	700	800	900	1000	1100	1200	1300	1400

160 kg *															
spessore vetro max maximum thickness of the glass - s [mm]															
2700	50	50	47	40	34	30	26	24	22	20	18	17	16	15	14
2600	50	50	49	41	35	31	27	25	22	21	19	18	16	15	14
2500	50	50	50	43	37	32	28	26	23	21	20	18	17	16	15
2400	50	50	50	44	38	33	30	27	24	22	21	19	18	17	16
2300	50	50	50	46	40	35	31	28	25	23	21	20	19	17	16
2200	50	50	50	48	42	36	32	29	26	24	22	21	19	18	17
2100	50	50	50	50	44	38	34	30	28	25	23	22	20	19	16
2000	50	50	50	50	46	40	36	32	29	27	25	23	21	20	17
1900	50	50	50	50	48	42	37	34	31	28	26	24	22	19	18
1800	50	50	50	50	50	44	40	36	32	30	27	25	21	20	19
1700	50	50	50	50	50	47	42	38	34	31	29	24	23	21	20
1600	50	50	50	50	50	50	44	40	36	33	28	26	24	23	18
1500	50	50	50	50	50	50	47	43	39	36	30	27	26	20	15
1400	50	50	50	50	50	50	50	46	42	34	32	29	23	17	16
1300	50	50	50	50	50	50	50	49	40	37	34	26	20	18	12
1200	50	50	50	50	50	50	50	48	44	40	31	21	21	13	6
1100	50	50	50	50	50	50	50	50	48	36	27	25	16	7	N.D.
1000	50	50	50	50	50	50	50	50	44	32	30	18	9	N.D.	N.D.
900	50	50	50	50	50	50	50	43	39	24	11	N.D.	N.D.	N.D.	N.D.
800	50	50	50	50	50	50	50	48	29	13	N.D.	N.D.	N.D.	N.D.	N.D.
700	50	50	50	50	50	50	50	18	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.
600	50	50	50	50	50	50	24	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.
500	50	50	50	50	50	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.	N.D.
H / L	370	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700