

# WEEN KIT CERNIERE 160kg



Kit Cerniere Ween | Ween hinge | Charnières Ween | Bisagras Ween



Cerniere in estruso e zama, contropiastre in zama e acciaio inox e viti; perni viti e grani in acciaio inox.



Extruded aluminum and zamak hinges, counterplates in stainless steel and zamak, screws and setscrews in stainless steel.



Charnières en aluminium extrudé et zamak, gâches en acier inox et zamak, vis et grains en acier inox.




Bisagras de aluminio extruido y zamak, cerraderos de acero y zamak, tornillos y prisioneros de acero inox.




ART.	3422.24				3400.50			
Imballo   Package   Conditionnement   Embalaje	5 Pz				20 Pz			
Finiture disponibili   Available finishes Finitions disponibles   Acabados disponibles	1	2	3	4	1	2	3	4


Art. 3422.24

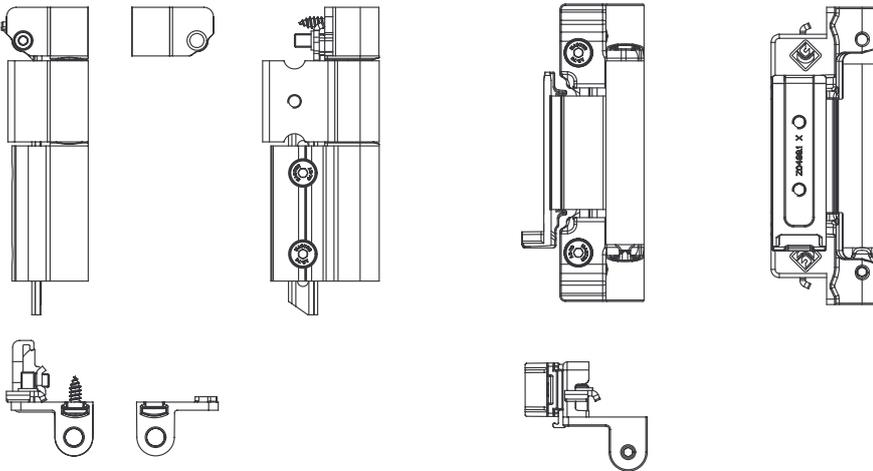

Art. 3400.50  
Dima di foratura  
Drilling template

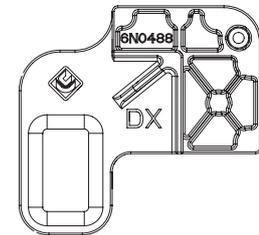

## REGOLAZIONI | ADJUSTEMENT

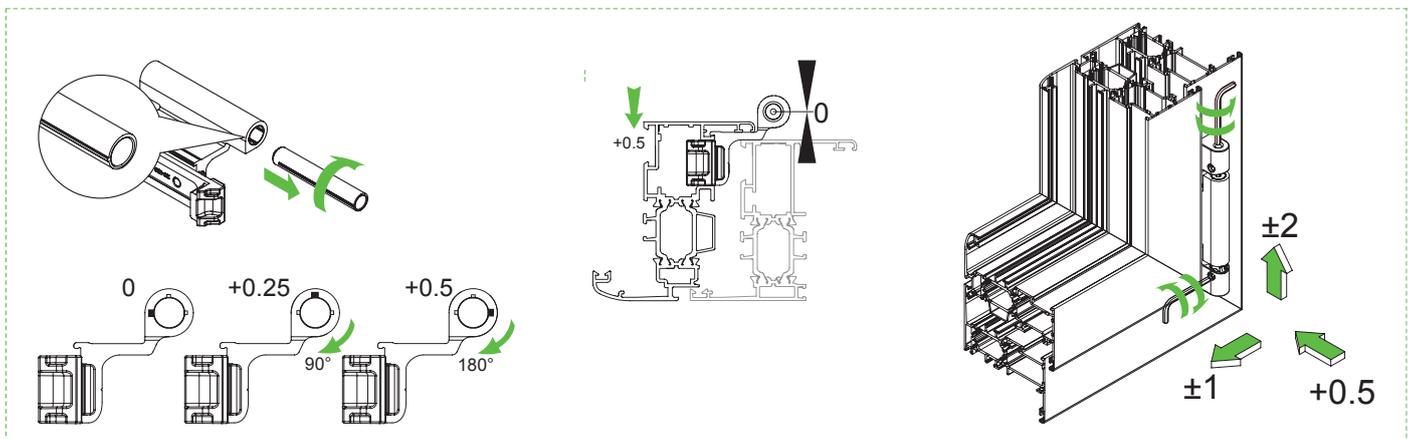

ART.	NODO   SECTION
3422.24	A01 - A03 - A05



# DIAGRAMMI DI CARICO

## LOAD CHART

TABELLE DI CARICO PER CONFIGURAZIONI MONOANTA  
LOAD CHARTS FOR ONE SASH CONFIGURATIONS

100 kg		spessore vetro max   maximum thickness of the glass - s [mm]											
2700	40	37	30	25	21	19	16	15	13	12	11	11	
2600	42	38	31	26	22	19	17	15	14	13	12	11	
2500	43	40	32	27	23	20	18	16	15	13	12	11	
2400	45	42	33	28	24	21	19	17	15	14	13	12	
2300	47	43	35	29	25	22	19	17	16	14	13	12	
2200	49	45	36	30	26	23	20	18	17	15	14	13	
2100	50	48	38	32	27	24	21	19	17	16	15	14	
2000	50	50	40	33	29	25	22	20	18	17	15	14	
1900	50	50	42	35	30	26	23	21	19	18	16	15	
1800	50	50	44	37	32	28	25	22	20	19	17	16	
1700	50	50	47	39	34	29	26	24	21	20	18	15	
1600	50	50	50	42	36	31	28	25	23	21	17	16	
1500	50	50	50	44	38	33	30	27	24	22	18	17	
1400	50	50	50	48	41	36	32	29	26	21	20	18	
1300	50	50	50	50	44	38	34	31	25	23	21	16	
1200	50	50	50	50	48	42	37	30	27	25	19	14	
1100	50	50	50	50	50	45	36	33	30	23	17	16	
1000	50	50	50	50	50	50	40	36	27	20	18	11	
900	50	50	50	50	50	50	44	27	24	15	7	N.D.	
800	50	50	50	50	50	50	33	30	18	8	N.D.	N.D.	
700	50	50	50	50	50	43	38	11	N.D.	N.D.	N.D.	N.D.	
600	50	50	50	50	50	33	15	N.D.	N.D.	N.D.	N.D.	N.D.	
500	50	50	50	50	46	N.D.							
H \ L	370	400	500	600	700	800	900	1000	1100	1200	1300	1400	

160 kg *		spessore vetro max   maximum thickness of the glass - s [mm]														
2700	50	50	47	40	34	30	26	24	22	20	18	17	16	15	14	
2600	50	50	49	41	35	31	27	25	22	21	19	18	16	15	14	
2500	50	50	50	43	37	32	28	26	23	21	20	18	17	16	15	
2400	50	50	50	44	38	33	30	27	24	22	21	19	18	17	16	
2300	50	50	50	46	40	35	31	28	25	23	21	20	19	17	16	
2200	50	50	50	48	42	36	32	29	26	24	22	21	19	18	17	
2100	50	50	50	50	44	38	34	30	28	25	23	22	20	19	16	
2000	50	50	50	50	46	40	36	32	29	27	25	23	21	20	17	
1900	50	50	50	50	48	42	37	34	31	28	26	24	22	19	18	
1800	50	50	50	50	50	44	40	36	32	30	27	25	21	20	19	
1700	50	50	50	50	50	47	42	38	34	31	29	24	23	21	20	
1600	50	50	50	50	50	50	44	40	36	33	28	26	24	23	18	
1500	50	50	50	50	50	50	47	43	39	36	30	27	26	20	15	
1400	50	50	50	50	50	50	50	46	42	34	32	29	23	17	16	
1300	50	50	50	50	50	50	50	49	40	37	34	26	20	18	12	
1200	50	50	50	50	50	50	50	48	44	40	31	21	21	13	6	
1100	50	50	50	50	50	50	50	50	48	36	27	25	16	7	N.D.	
1000	50	50	50	50	50	50	50	50	44	32	30	18	9	N.D.	N.D.	
900	50	50	50	50	50	50	50	43	39	24	11	N.D.	N.D.	N.D.	N.D.	
800	50	50	50	50	50	50	50	48	29	13	N.D.	N.D.	N.D.	N.D.	N.D.	
700	50	50	50	50	50	50	50	18	N.D.							
600	50	50	50	50	50	50	24	N.D.								
500	50	50	50	50	50	N.D.										
H \ L	370	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	