



BING

MOVIMENTAZIONE BIDIREZIONALE REGOLABILE



Movimentazione bidirezionale | Two-way movement |
Mouvement bidirectionnel | Movimiento bidireccional



Realizzata in zama zincata; tassello di regolazione in nylon, entrata regolabile



Made of galvanized zamak; Nylon adjustment plug, adjustable entry



Réalisé en zamak zingué; pièce de réglage en nylon, entrée réglable




Fabricado en zamak galvanizado; Taco de regulación en nylon, entrada ajustable




ART.	3626.1 3626.2			
Imballo Package Conditionnement Embalaje	10 PZ			
Finiture disponibili Available finishes Finitions disponibles Acabados disponibles	1	2	3	4

DESCRIZIONE DESCRIPTION	ART.	ENTRATA MIN. MIN BACKSET	ENTRATA MAX MAX BACKSET	NODI SECTION
"BING" Movimentazione bidirezionale	3626.1	15	27	A01 - A02 A03 - A05
"BING" Two-way movement	3626.2	23	35	A06 - A08

Art. 3626.1

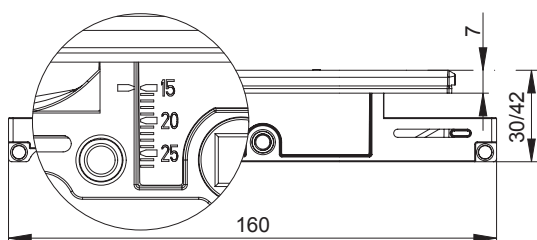

Art. 3626.2

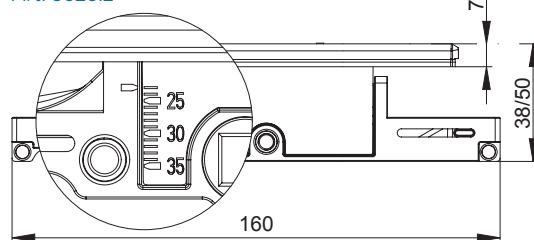

PERNO DI COLLEGAMENTO CONNECTION PIN	
Art.	ENTRATA BACKSET
6420E.11	15-20 mm
6420E.13	16-22 mm
6420E.16	19-25 mm
6420E.18	22-27 mm
6420E.22	25-31 mm
6420E.25	28-34 mm
6420E.27	30-36 mm
6420E.31	34-40 mm

VITI DI COLLEGAMENTO CONNECTION SCREWS	
Art.	ENTRATA BACKSET
6422.1	30 mm
6422.2	35 mm

LAVORAZIONI | MACHINING

