



TELAIO - FRAME

3421.50

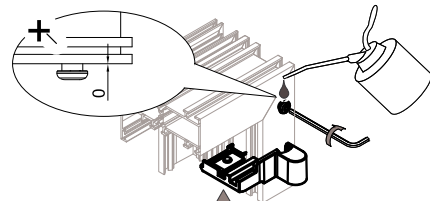

- IT Dima foratura DX e SX
- EN Drilling template
- FR Gabarit de perçage
- ES Plantilla para taladrar



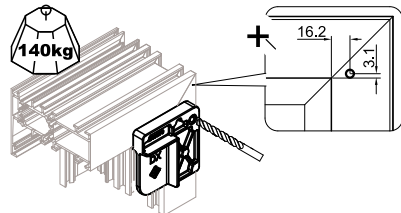


Utensili utilizzati
Tools used
Coppia / Torque MAX 3.5Nm




ATTENZIONE / WARNING
NON OBBLIGATORIO PER PESI ≤80kg
NON OBLIGATOIRE POUR LES POIDS ≤80kg
NO OBLIGATORIO DE PESO ≤80kg

3421.39
*Microventilazione opzionale
*Microventilation optional


*3421.21
*3421.22



Hm

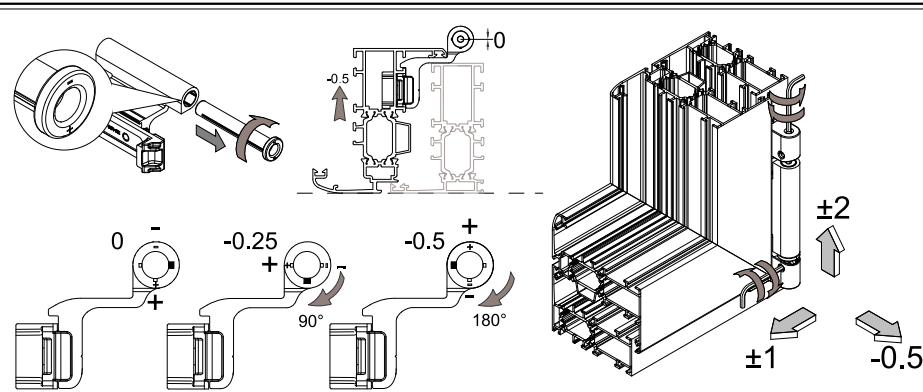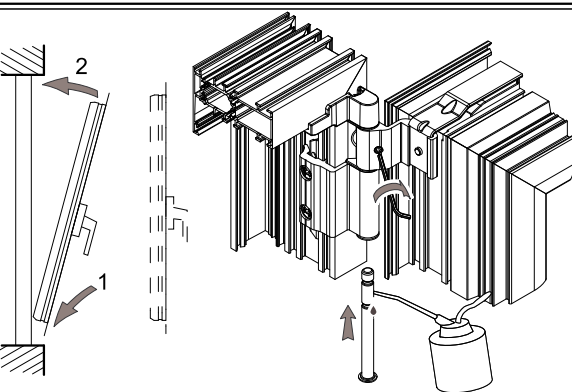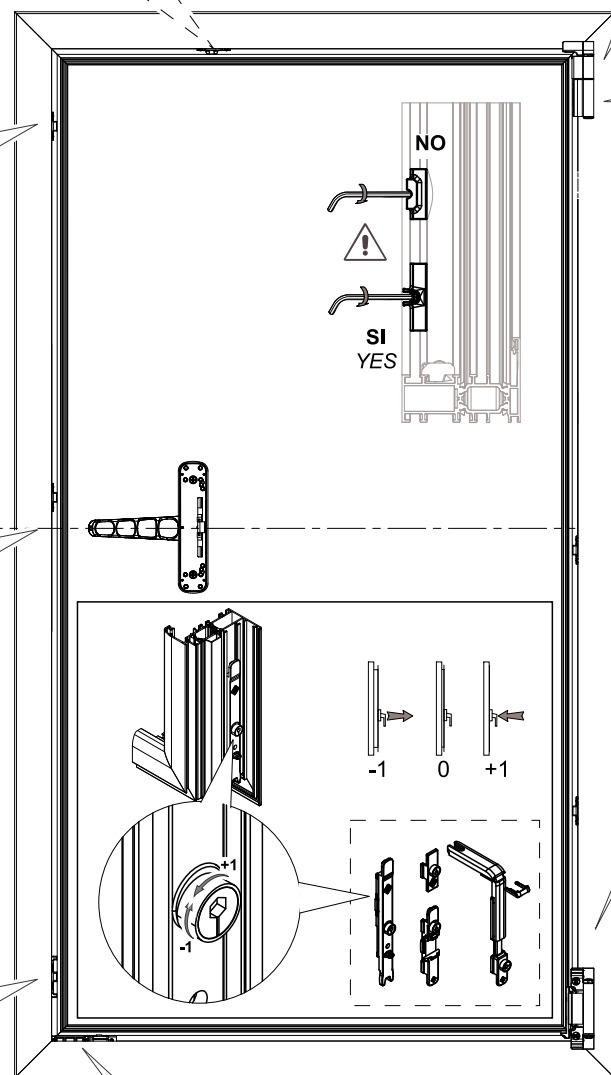

ANTA - SASH

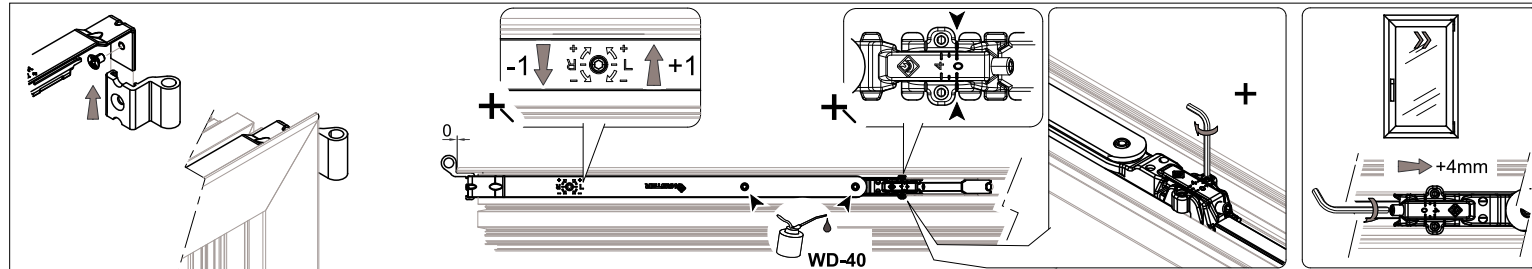

3421.22

3521.30 Opzionale Optional

3421.20 L-344
*3421.21 L-360
*3421.22 L-532

*In caso di doppia anta:
Anta principale Lmin= 550mm
Anta secondaria Lmin=370mm

Z-340

Y-200



H>1400 mm = H/2-166

3421.31 H>1400 mm

H/2 -166

3421.32 - H>2200mm

H/2 -400

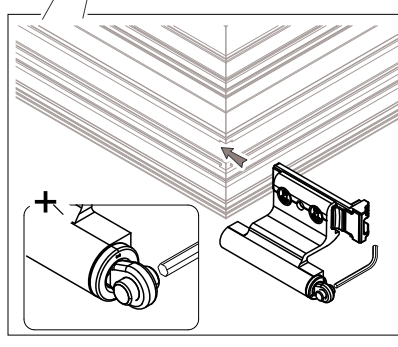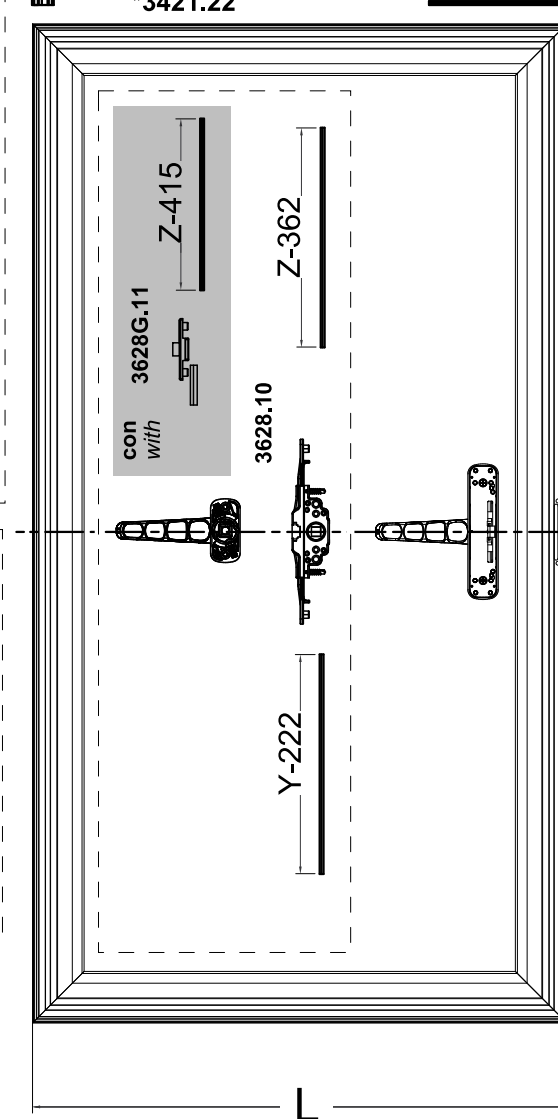



3421G.31/3421.35
L>1200mm

L/2-132

Per eventuali chiarimenti chiedere
info al nostro Off. Tecnico
tel. 080.4959823

For other information contact our
technical office at:
+39.08.04.95.98.23

PER APERTURA IMPEDITA A 180° BRACCIO LIMITATORE OBBLIGATORIO
IT IS MANDATORY TO USE A LIMITER ARM FOR WINDOWS
FOR WINDOWS WITH 180° RESTRICTED OPENING

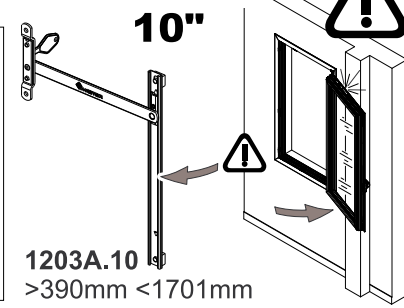

1203A.10
>390mm <1701mm