

**REGOLAZIONE
ADJUSTMENT**

Diagrams illustrating window adjustment steps:

- Top Left: Corner adjustment with $+4$ mm horizontal and ± 1 mm vertical arrows.
- Top Middle: Allen key adjustment for 2.5mm gap with $+4$ mm arrow.
- Top Right: Vertical adjustment with -1 mm down and $+1$ mm up arrows.
- Bottom Left: Multi-pane adjustment with $+3$ mm, $+2$ mm, and ± 0.5 mm arrows.
- Bottom Middle: Two diagrams for 3mm gap adjustment with $+3$ mm and $+2$ mm arrows.
- Bottom Right: 2.5mm gap adjustment with ± 0.5 mm arrow.

 140Kg - 90°																			
2700	47	41	35	30	26	23	21	19	17	16	15	14	13	12					
2600	49	43	36	31	27	24	22	20	18	17	15	14	13	13					
2500	50	45	37	32	28	25	22	20	19	17	16	15	14	13					
2400	50	47	39	33	29	26	23	21	19	18	17	16	15	14					
2300	50	49	41	35	30	27	24	22	20	19	17	16	15	14					
2200	50	50	42	36	32	28	25	23	21	20	18	17	16	15					
2100	50	50	44	38	33	30	27	24	22	21	19	18	17	14					
2000	50	50	47	40	35	31	28	25	23	22	20	19	18	15					
1900	50	50	49	42	37	33	29	27	25	23	21	20	17	16					
1800	50	50	50	44	39	35	31	28	26	24	22	19	18	16					
1700	50	50	50	47	41	37	33	30	27	25	21	20	19	17					
1600	50	50	50	50	44	39	35	32	29	24	23	21	20	15					
1500	50	50	50	50	47	41	37	34	31	26	24	22	18	13					
1400	50	50	50	50	50	44	40	36	30	28	26	20	15	14					
1300	50	50	50	50	50	48	43	35	32	30	23	17	16	10					
1200	50	50	50	50	50	50	42	38	35	27	20	19	12	5					
1100	50	50	50	50	50	50	46	42	35	32	22	14	6	X					
1000	50	50	50	50	50	50	50	38	28	26	16	7	X	X					
900	50	50	50	50	50	50	37	34	21	10	X	X	X	X					
800	50	50	50	50	50	47	42	25	11	X	X	X	X	X					
700	50	50	50	50	50	50	16	X	X	X	X	X	X	X					
615	50	50	50	50	47	19	X	X	X	X	X	X	X	X					
H L	440	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700					




CON LIMITATORE 1114.X

E 3310.50



WITH LIMITER 1114.X













END 3310.50



Con 4516.10 Hmin anta 800mm
With 4516.10 Hmin sash 800mm

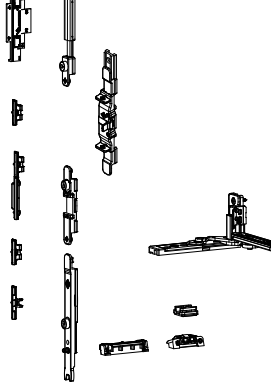

3321G.2 / 3321LG.2		Riferimento nodo sistema ERRE ERRE system section riferiment
ITA 		 A08




Maniglie Handles							
6018.21		6038.25		6015.21 - 6010.21		6036.25	
						6061.21	
						6063.25	
3072		3077.2 - 3077.25		3070		3070.2 - 3075.25	
						3100	
						3101 - 3101.25	

MASTER S.r.l. - I666A - A3 FR- 28/02/2023 La master srl non risponde in alcun modo di possibili inesattezze imputabili ad errori di stampa o di trascrizione dall'originale presente foglio.
Master does not bear any responsibility for possible inexactnesses due to printing mistakes or to transcription


		ANTA RIBALTA		TILT AND TURN							
				T&T							
				3321G.2							

MANOVRA LOGICA TILT BEFORE TURN	
AFM Apertura Open Ribalta Tilt Chiusura Locking	3321LG.2






MONTAGGIO CERNIERA SUPERIORE TOP HINGE ASSEMBLY

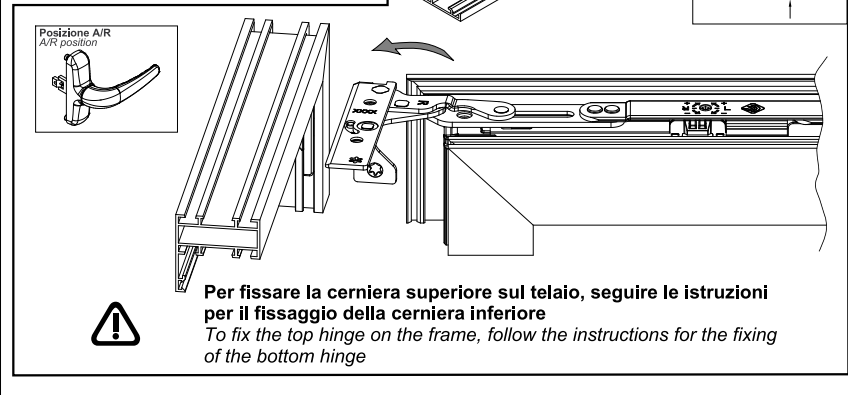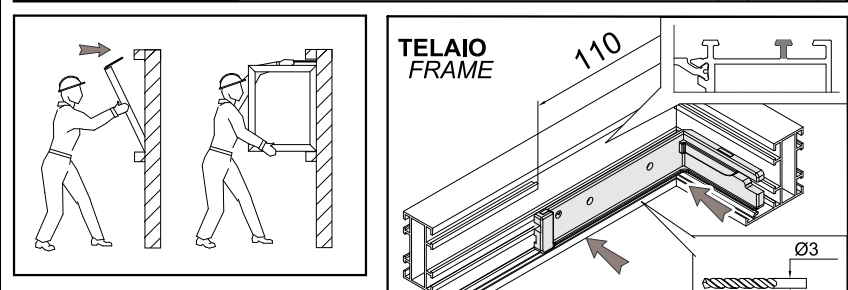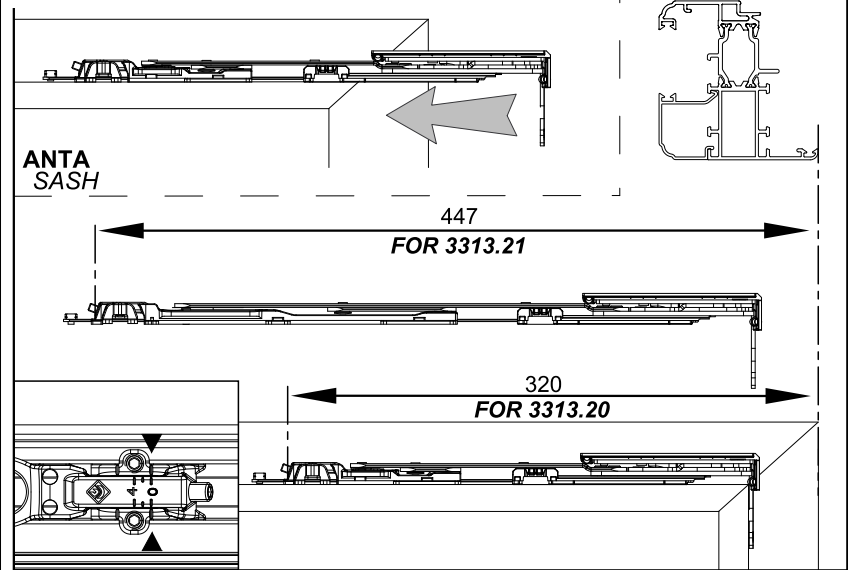


MONTAGGIO CERNIERA INFERIORE BOTTOM HINGE ASSEMBLY

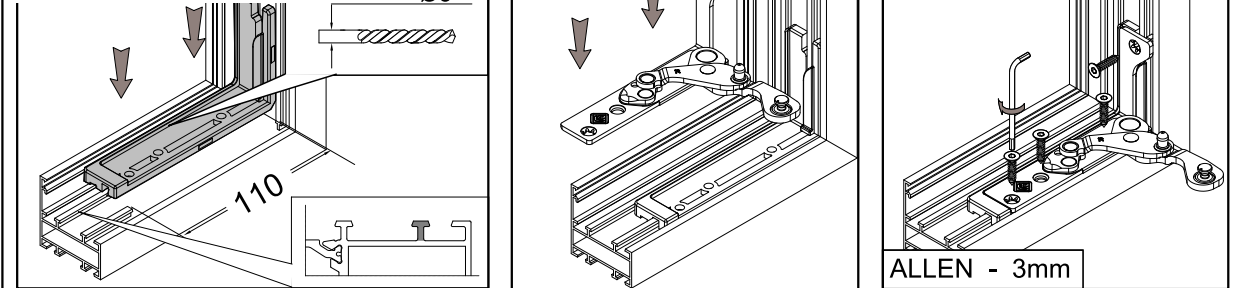


*** Da abbinare a 3521.39**
In combination with 3521.39

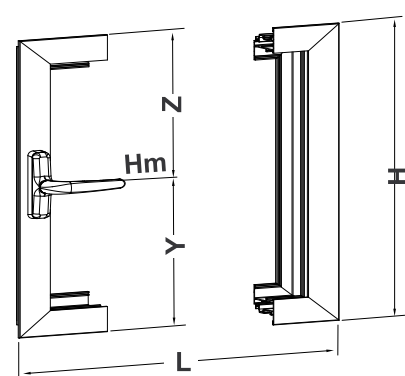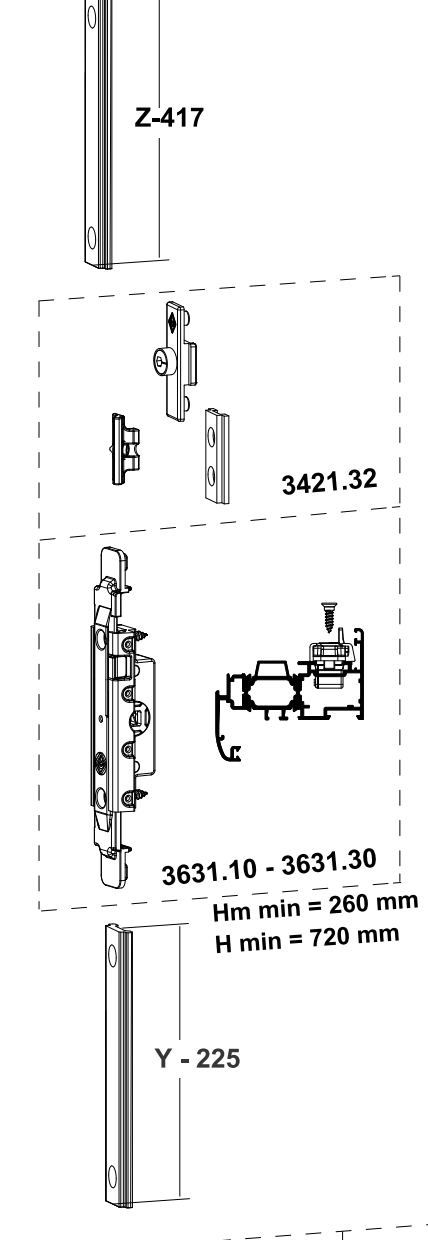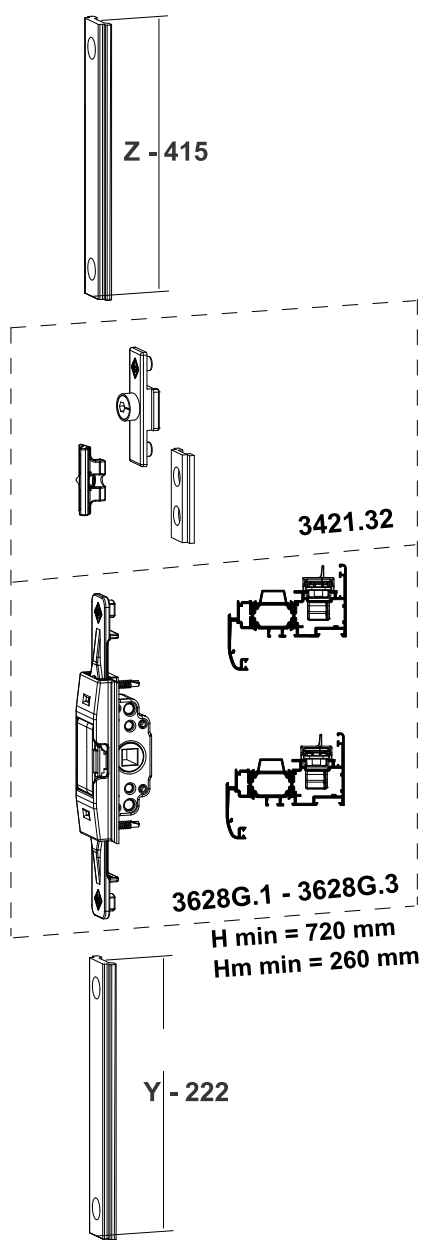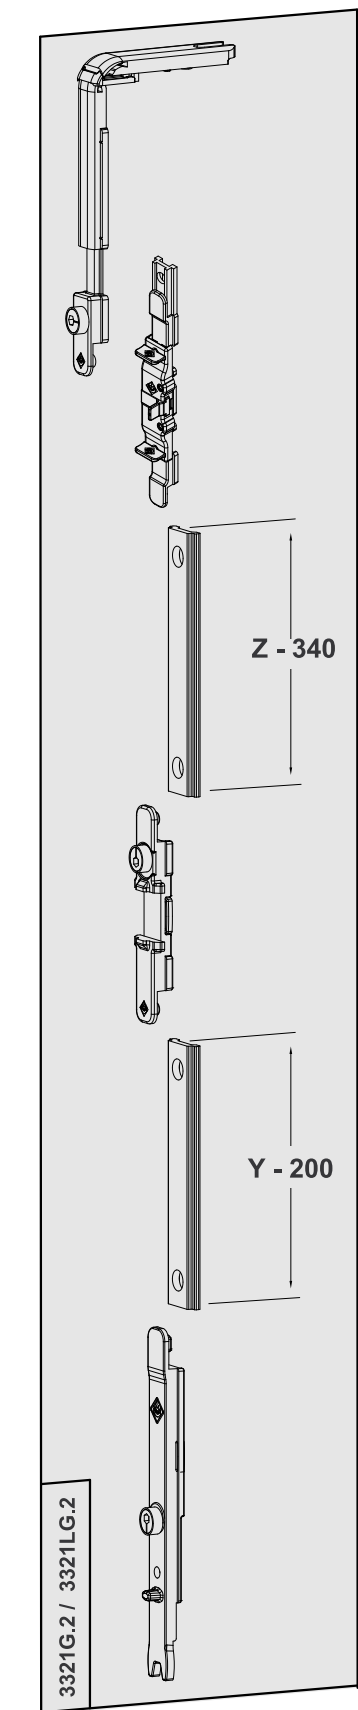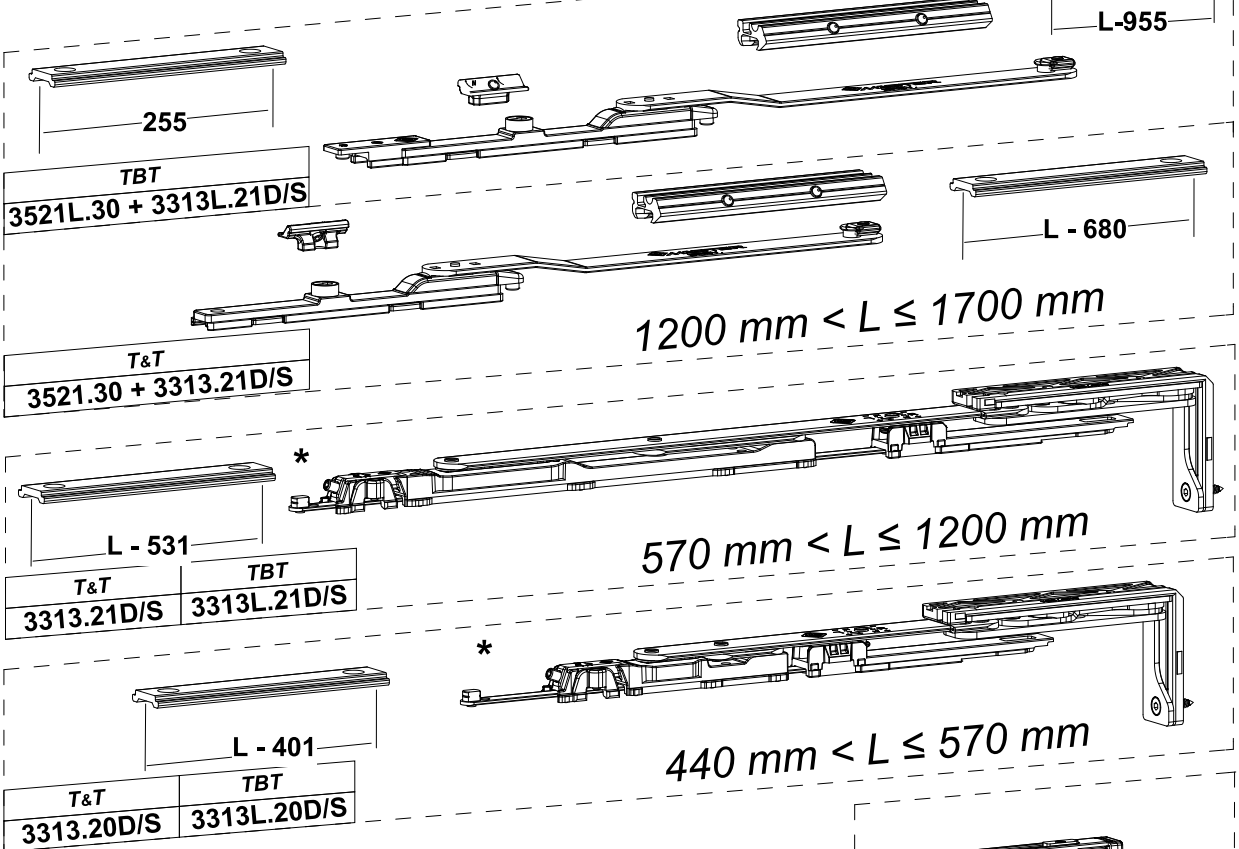

Hm min = 237 mm
Anta singola - Single sash

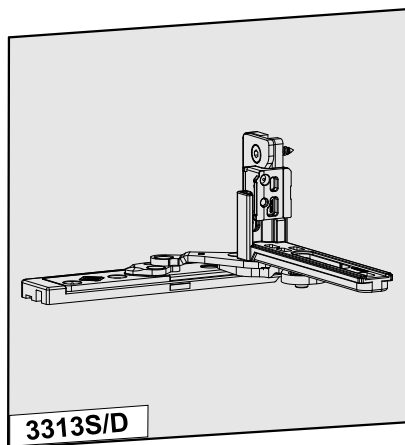

3313S/D

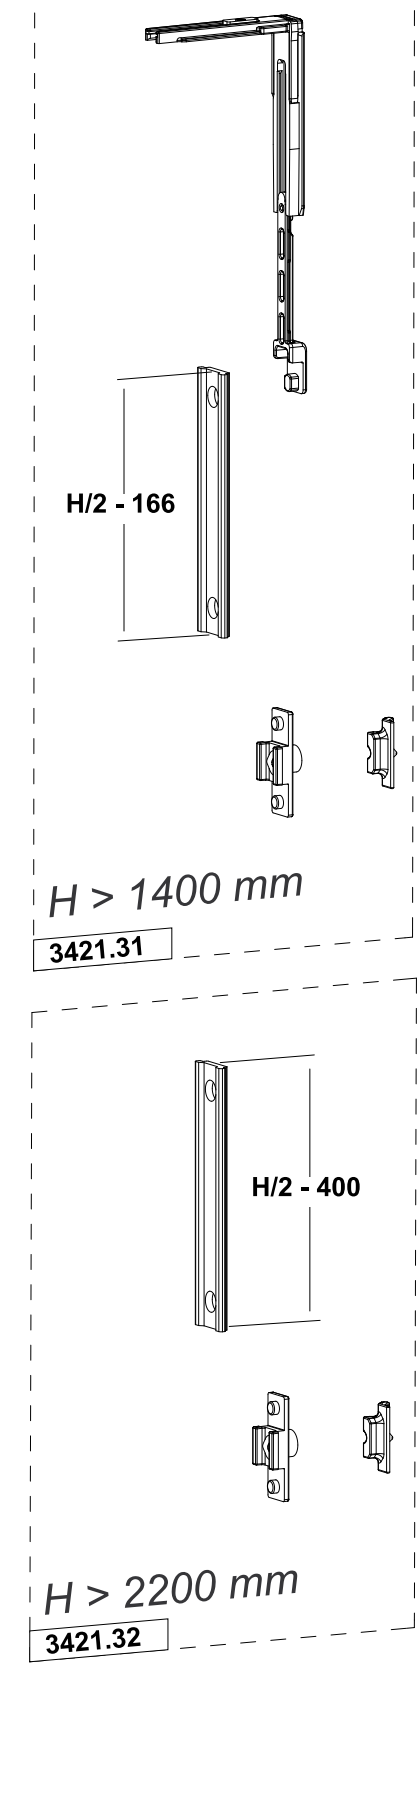


H/2 - 166

H > 1400 mm
3421.31

H/2 - 400

H > 2200 mm
3421.32

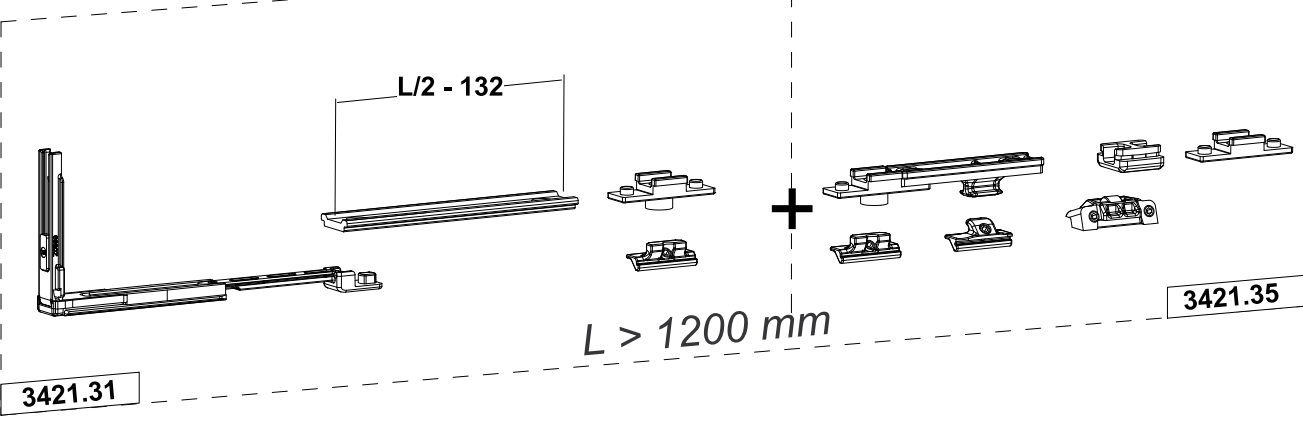

L > 1200 mm
3421.35