


## Articoli complementari

Complementary articles

3080.25

### Doppio maniglione alzante




- EN- Double handle lifting
- FR- Double poignée levée
- PL- Podwójny uchwyt podnoszenia
- RU- Двойная ручка повышени
- ES- Elevación asa doble

#### Note:

IT- Utilizzare gli spessori in nylon della giusta misura, tra profilo e cremone.  
EN- Use right nylon spacers dimension between handle and cremone.

3080.20

### Maniglione alzante + traino




- EN- Handle lifting + trailer
- FR- Poignée de levage + tirant
- PL- Uchwyt podnoszenia+ciągacz
- RU- подъемная ручка + буксировочное
- ES- Palanca de elevación + tira

#### Note:

IT- Utilizzare gli spessori in nylon della giusta misura, tra profilo e cremone.  
EN- Use right nylon spacers dimension between handle and cremone.

2129.4


### Copricilindro



- EN- Cylinder cover
- FR- Kit cache cylindre
- PL- Osłona cylindra
- RU- крышка цилиндра
- ES- Cobertura cilindro

6844.1


### Tassello paracolpi



- EN- Door bumper
- FR- Butée de coulissant
- PL- Kotwa zderzak
- RU- бампер дюбель
- ES- Amortiguador para correderas

6836.XX

### Tassello di tenuta centrale superiore




| Art.    | A  | B   | C  |
|---------|----|-----|----|
| 6836.7  | 30 | 140 | 55 |
| 6836.10 | 30 | 100 | 44 |
| 6836.12 | 30 | 100 | 26 |
| 6836.14 | 30 | 100 | 63 |

- EN- Block with center seal and brush - hinger
- FR- Patin etancheite centrale avec joint brosse-supérieur
- PL- Kołków górny środkowy uszczelnienia
- RU- Дюбель верхнего центрального уплотнения
- ES- Taco retenedor central con cepillo - mayor

6836.XX

### Tassello di tenuta centrale inferiore



| Art.    | A  | B   | C    |
|---------|----|-----|------|
| 6836    | 30 | 90  | 33.5 |
| 6836.3  | 25 | 90  | 31.5 |
| 6836.11 | 20 | 90  | 28.5 |
| 6836.13 | 20 | 90  | 63   |
| 6836.15 | 8  | 100 | 44   |
| 6836.16 | 11 | 100 | 44   |

- EN- Block with center seal and brush - lower
- FR- Patin etancheite centrale avec joint brosse-inférieur
- PL- Kołków dolną środkową uszczelnienia
- RU- Дюбель нижний центральный уплотнение
- ES- Taco retenedor central con cepillo - inferior



HARDWARE FOR WINDOWS AND DOORS


<http://www.masteritaly.com>

**ALZANTE SCORREVOLE 300/400Kg**  
**LIFT & SLIDE 300/400Kg**



Video montaggio disponibile su MASTERTUBE  
Video mounting available on MASTERTUBE  
Video montage disponible sur MASTERTUBE

**AS300**

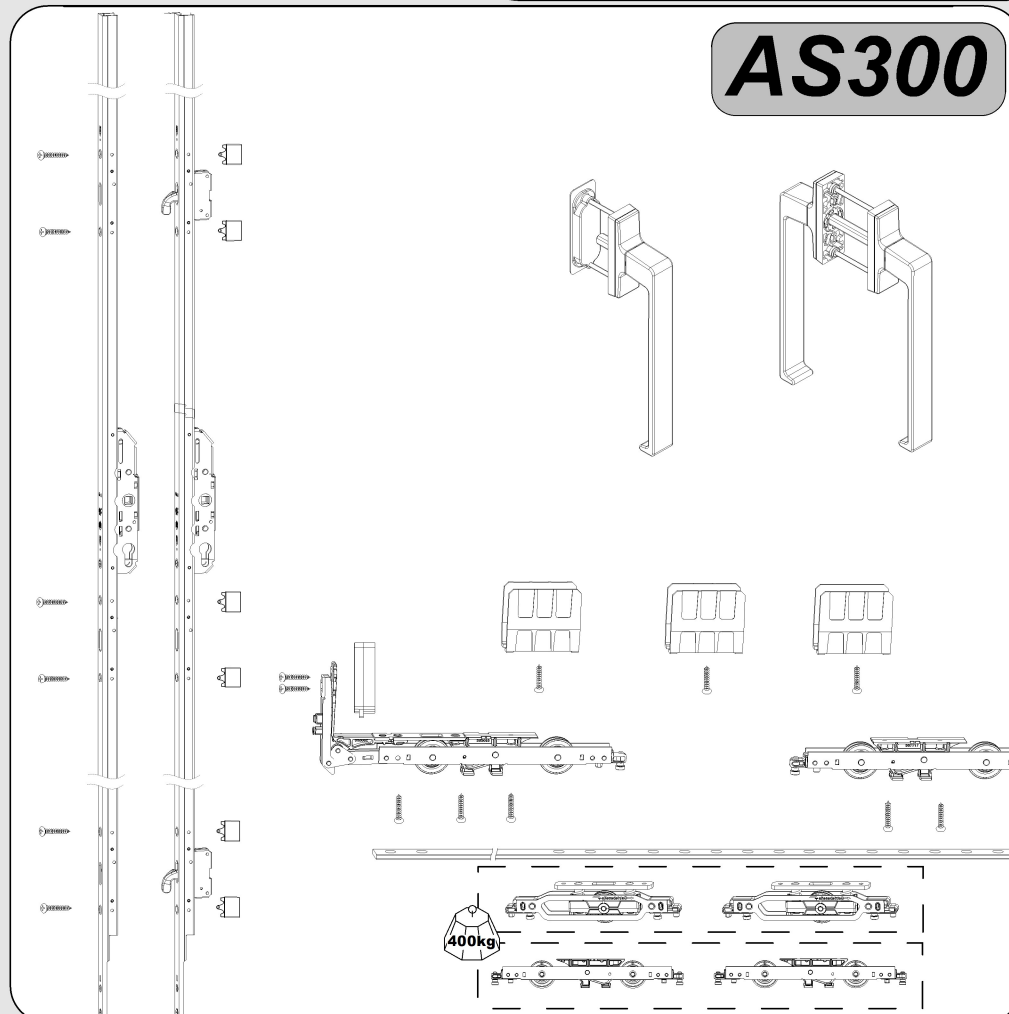

MASTER S.r.l. - I4770 - A3

04/07/2024 La master srl non risponde in alcun modo di possibili inesattezze imputabili ad errori di stampa o di trascrizione dati nel presente foglio.  
Master does not bear any responsibility for possible inexactnesses due to printing mistakes or to transcription


## Articoli supplementari

Additional articles

6740.10

### Carrelli supplementare

L Amin > 1200mm




- EN- Additional rollers
- FR- Chariot supplémentaire
- PL- Dodatkowych rolek
- RU- Набор дополнительного ролика
- ES- Rueda adicional

6740.11

L Amin > 1400mm



- EN- Additional rollers
- FR- Chariot supplémentaire
- PL- Dodatkowych rolek
- RU- Набор дополнительного ролика
- ES- Rueda adicional

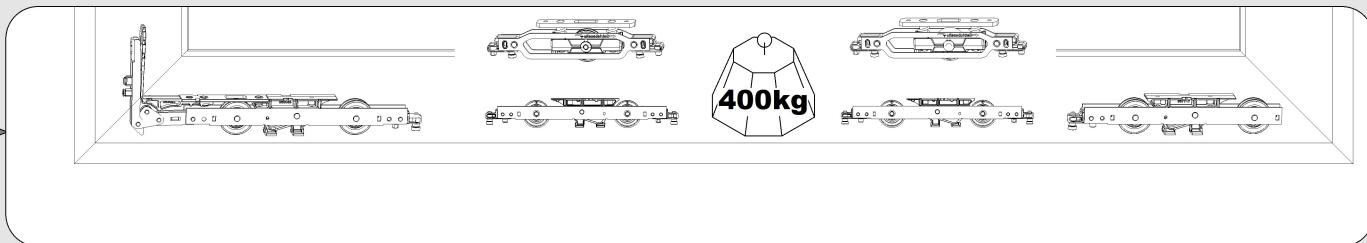

6737.2

### Ammortizzatore serratura

150-300 Kg (HA min 1660)




- EN- Damper lock
- FR- Choc serrure
- PL- Szok blokady
- RU- замок шок
- ES- Choque de bloqueo

6737.3

250-400Kg (HA min 1660)



- EN- Damper lock
- FR- Choc serrure
- PL- Szok blokady
- RU- замок шок
- ES- Choque de bloqueo

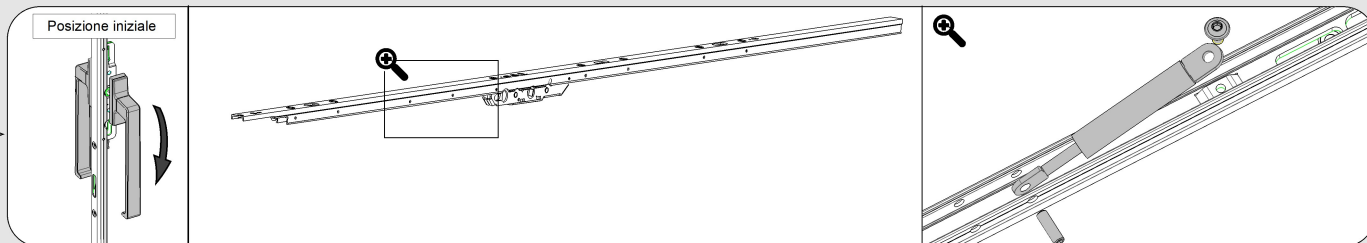

6734.XX

### Microventilazione




| Art.    | X    |
|---------|------|
| 6734.11 | 12   |
| 6734.12 | 14.5 |
| 6734.13 | 15.5 |
| 6734.14 | 19.5 |
| 6734.15 | 21.5 |
| 6734.16 | 26.5 |
| 6734.17 | 10.5 |

- EN- Microventilation
- FR- Micro ventilation
- PL- Zestaw mikrowentylacji
- RU- набор для микровентилиации
- ES- Microventilación

6734.30

### Kit spessore chiusure standard




- EN- Standard thickness closures
- FR- Fermetures d'épaisseur standard
- PL- Standardowe grubości zamknięcia
- RU- Стандартные затворы толщины
- ES- Cierres de espesor estándar


## Specifiche di sistema

System specifications

L anta Min = 720mm  
L anta Max = 3385mm

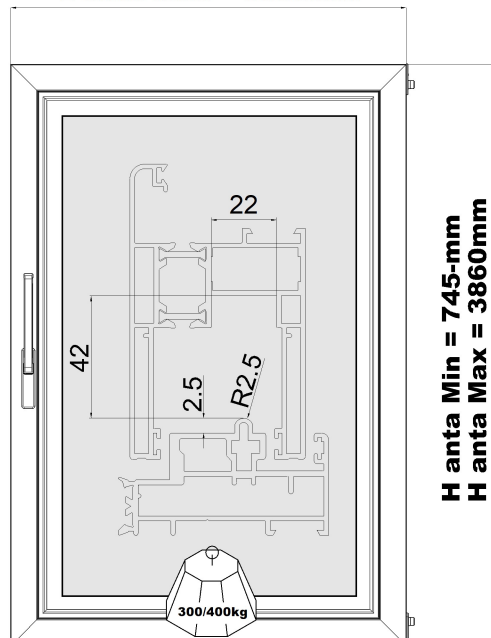


H anta Min = 745-mm  
H anta Max = 3860mm

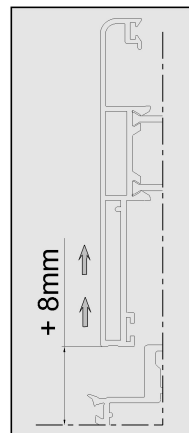

## Lavorazioni serratura

Lock machining

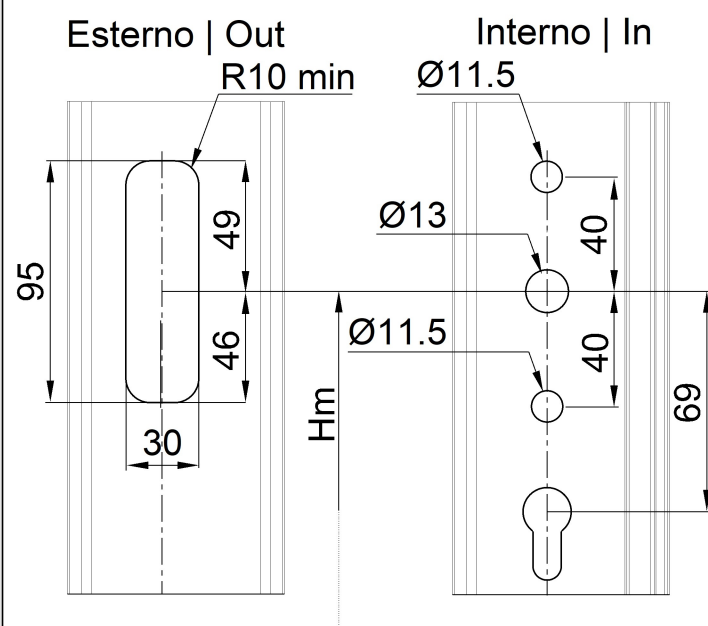


Per eventuali chiarimenti chiedere info al nostro Uff. Tecnico tel. 080.4959823

For other information contact our technical office at: +39.08.04.95.98.23

## Aste di chiusura standard

Standard closing rods

| Art.    | L    | H <sub>Amin</sub> | H <sub>Amax</sub> | HM    | E    |  |  |  |
|---------|------|-------------------|-------------------|-------|------|--|--|--|
| 6730.13 | 1300 | 745               | 1360              | 396.5 | 27.5 |  |  |  |
| 6730.17 | 1700 | 1260              | 1760              | 396.5 |      |  |  |  |
| 6730.21 | 2100 | 1660              | 2160              | 996.5 |      |  |  |  |
| 6730.25 | 2500 | 2060              | 2560              | 996.6 |      |  |  |  |
| 6730.28 | 2800 | 2460              | 2860              | 996.5 |      |  |  |  |
| 6730.33 | 3300 | 2760              | 3360              | 996.5 |      |  |  |  |
| 6730.38 | 3800 | 3260              | 3860              | 996.5 | 37.5 |  |  |  |
| 6731.13 | 1300 | 745               | 1360              | 396.5 |      |  |  |  |
| 6731.17 | 1700 | 1260              | 1760              | 396.5 |      |  |  |  |
| 6731.21 | 2100 | 1660              | 2160              | 996.5 |      |  |  |  |
| 6731.25 | 2500 | 2060              | 2560              | 996.5 |      |  |  |  |
| 6731.28 | 2800 | 2460              | 2860              | 996.5 |      |  |  |  |
| 6731.33 | 3300 | 2760              | 3360              | 996.5 | 10   |  |  |  |
| 6731.38 | 3800 | 3260              | 3860              | 996.5 |      |  |  |  |

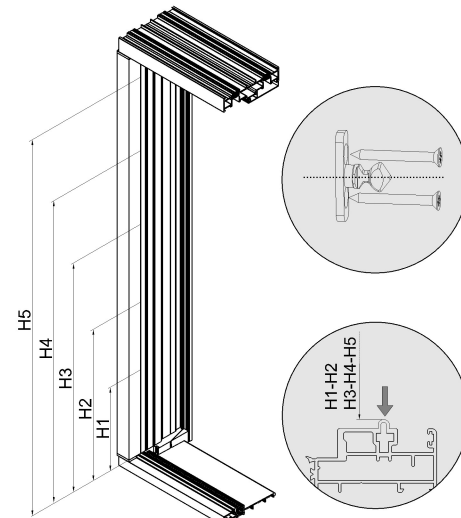

| Art.       | H1    | H2    | H3   | H4   | H5   |
|------------|-------|-------|------|------|------|
| 6730/31.13 | 195.5 | 585.5 | -    | -    | -    |
| 6730/31.17 | 195.5 | 585.5 | 1100 | -    | -    |
| 6730/31.21 | 195.5 | 695.5 | 1185 | 1500 | -    |
| 6730/31.25 | 195.5 | 695.5 | 1185 | 1900 | -    |
| 6730/31.28 | 195.5 | 695.5 | 1185 | 2300 | -    |
| 6730/31.33 | 195.5 | 695.5 | 1185 | 1900 | 2700 |
| 6730/31.38 | 195.5 | 695.5 | 1185 | 2300 | 3100 |

6734.X

### Chiusure standard

| Art.   | X    |
|--------|------|
| 6734.1 | 10.5 |
| 6734.2 | 12   |
| 6734.3 | 14.5 |
| 6734.4 | 15.5 |
| 6734.5 | 21.5 |
| 6734.6 | 26.5 |

EN - Standard closures

FR - Fermetures standards

PL - Standardowe zamknięcia


RU - стандартные затворы

ES - Cierres estándar

## Indicazioni di montaggio


Mounting instructions

| Art.    | L    | H <sub>Amin</sub> | H <sub>Amax</sub> | HM    | E    |  |  |  |
|---------|------|-------------------|-------------------|-------|------|--|--|--|
| 6732.13 | 1305 | 735               | 1360              | 396.5 | 27.5 |  |  |  |
| 6732.19 | 1900 | 1235              | 1960              | 396.5 |      |  |  |  |
| 6732.25 | 2500 | 1835              | 2560              | 996.5 |      |  |  |  |
| 6732.28 | 2800 | 2270              | 2860              | 996.6 |      |  |  |  |
| 6732.33 | 3300 | 2670              | 3360              | 996.5 |      |  |  |  |
| 6732.38 | 3800 | 2670              | 3860              | 996.5 |      |  |  |  |
| 6733.13 | 1305 | 735               | 1360              | 396.5 | 37.5 |  |  |  |
| 6733.19 | 1900 | 1235              | 1960              | 396.5 |      |  |  |  |
| 6733.25 | 2500 | 1835              | 2560              | 996.5 |      |  |  |  |
| 6733.28 | 2800 | 2270              | 2860              | 996.5 |      |  |  |  |
| 6733.33 | 3300 | 2670              | 3360              | 996.5 |      |  |  |  |
| 6733.38 | 3800 | 2670              | 3860              | 996.5 |      |  |  |  |

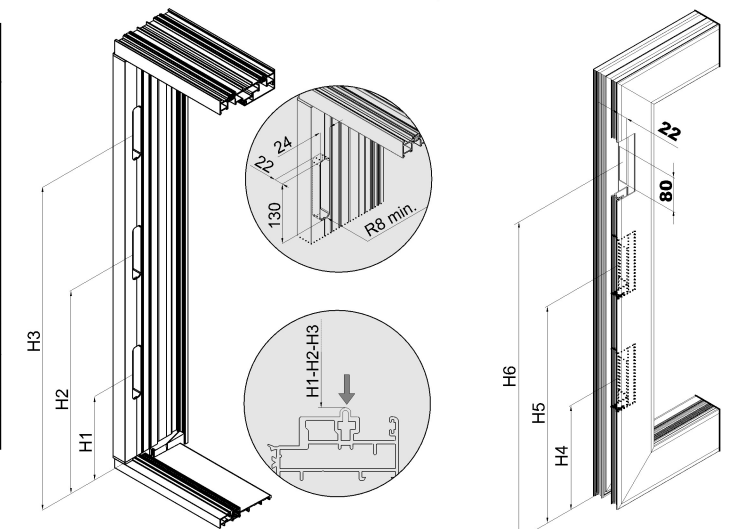

### Chiusure per ganci

6735



EN - Closures for hooks

FR - Fermetures pour crochets

PL - Zamknięcia do haków

RU - Затворы крючками


ES - Los cierres de los ganchos

| Art.       | H1  | H2   | H3   |
|------------|-----|------|------|
| 6732/33.13 | 212 | 582  | -    |
| 6732/33.19 | 212 | 1082 | -    |
| 6732/33.25 | 212 | 1678 | -    |
| 6732/33.28 | 212 | 1210 | 2110 |
| 6732/33.33 | 212 | 1410 | 2510 |
| 6732/33.38 | 212 | 1410 | 2510 |

| H4  | H5   | H6   |
|-----|------|------|
| 222 | 594  | -    |
| 222 | 1094 | -    |
| 222 | 1690 | -    |
| 222 | 1222 | 2122 |
| 222 | 1422 | 2522 |
| 222 | 1422 | 2522 |

6736.XX

### Spessori aste



| Art.    | X    |
|---------|------|
| 6736.4  | 4    |
| 6736.10 | 10   |
| 6736.14 | 14   |
| 6736.16 | 16.5 |
| 6736.18 | 18.5 |

| Art.    | X    |
|---------|------|
| 6736.20 | 20.5 |
| 6736.22 | 22   |
| 6736.25 | 25.5 |
| 6736.30 | 30   |
| 6736.32 | 32   |
| 6736.36 | 36   |


EN - Auction thicknesses

FR - épaisseurs d'enchères


PL - Grubość aukcja

RU - толщина аукциона

ES - Espesores de subastas

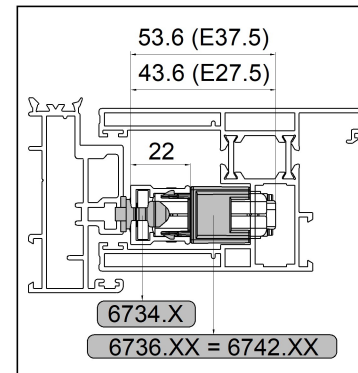


6734.X  
6736.XX = 6742.XX

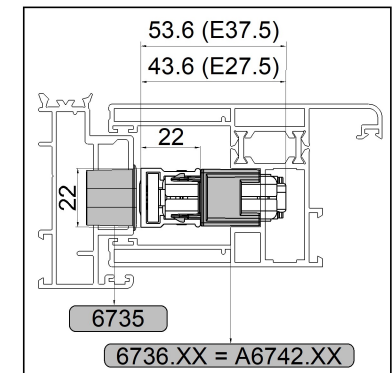

6735  
6736.XX = A6742.XX

6742.XX

### Spessori carrelli - verticali



| Art.    | X    |
|---------|------|
| 6742.10 | 10   |
| 6742.14 | 14   |
| 6742.16 | 16.5 |
| 6742.18 | 18.5 |
| 6742.20 | 20.5 |
| 6742.22 | 22   |

| Art.    | X    |
|---------|------|
| 6742.25 | 25.5 |
| 6742.26 | 26.5 |
| 6742.29 | 29   |
| 6742.30 | 30   |
| 6742.32 | 32   |
| 6742.36 | 36   |

EN - Trucks thicknesses - Vertical

FR - Camions épaisseurs - Vertical


PL - Ciężarówki grubości - Pionowy

RU - грузовики толщины - вертикаль

ES - Camiones espesores - Vertical

6742A.XX

### Spessori carrelli - orizzontali

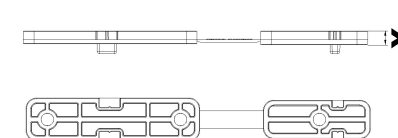

| Art.     | X  |
|----------|----|
| 6742A.3  | 3  |
| 6742A.5  | 5  |
| 6742A.6  | 6  |
| 6742A.8  | 8  |
| 6742A.10 | 10 |

EN - Trucks thicknesses - Orizzontal

FR - Camions épaisseurs - Horizontal

PL - Ciężarówki grubości - Poziomy


RU - грузовики толщины - горизонталь

ES - Camiones espesores - Horizontal

6741.X

### Collegamento carrelli

| Art.    | Kg  | X         |
|---------|-----|-----------|
| 6740    | 300 | LA - 605  |
| 6740.10 | 400 | LA - 1080 |
| 6740.11 | 400 | LA - 1224 |

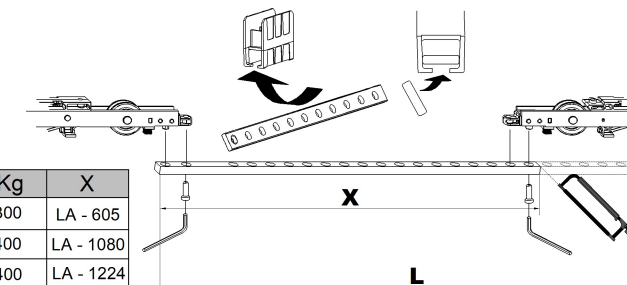

| Art.   | L <sub>Amin</sub> | L <sub>Amax</sub> | L    |
|--------|-------------------|-------------------|------|
| 6741.1 | 720               | 1300              | 692  |
| 6741.2 | 1225              | 1800              | 1196 |
| 6741.3 | 1730              | 2305              | 1700 |
| 6741.4 | 2235              | 2810              | 2204 |
| 6741.5 | 2740              | 3385              | 2708 |

EN - Rod of connecting rollers

FR - Jonction chariots

PL - Rod podłączenia rolki

RU - подключение грузовиков

ES - Varilla de conexión de rodillos

